


WiPro III *safe.lock*



Installation/user manual

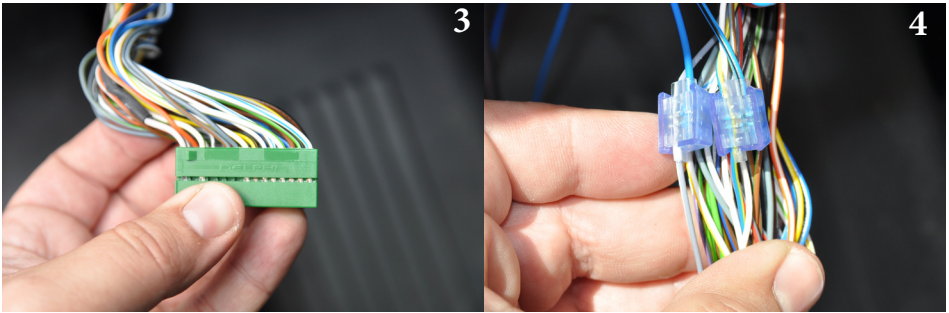

1. Handling

Your WiPro III is equipped with the safe.lock function. Thus the WiPro recognizes the original doors of the vehicle, but ignores the car's remote (to close the vehicles security gap).

Handling of alarm system and central locking is always possible with the Thitronik remote control 868 (smaller and bigger button) and with the delivered remote control 868 (new).

Every use of the buttons switches to the next state - both buttons can open and close. And every time the whole central locking is activated!

A new feature: The smaller button, respectively the upper button with the crossed speaker symbol works without switching tone. The bigger/lower button switches always with tone. So passengers can leave the car without waking up the others. On demand this feature can be disabled using DIP switch number 6:

DIP 6 on (standard)	Small/upper button switches without signal tone
DIP 6 off	Small/upper button switches with signal tone
DIP 5 on (standard for safe.lock)	Ignoring the vehicle remote, still evaluation of CAN doors

The original vehicle key can also be equipped with an optional conversion printed circuit board (Art. no.: 101052), so use of the key can continue without reservation.

2. Installation

Additional to normal installation to Ducato and similar, there are two wires to be connected to the green connector of the body computer(see picture 1, yellow circle;front of the body computer/fuse box):

Model year	Pin Fiat (picture 2)	Cable color Fiat		Cable color WiPro	Function
2006-2012 (Euro4)	Pin 28	blue/yellow	→	blue/black	Central locking front
	Pin 50	pink/violet	→	blue	Central locking rear (if existing)
2012+	Pin 53	blue/yellow	→	blue/black	Central locking front
	Pin 27	grey/white	→	blue	Central locking rear (if existing)

Hersteller/Manufacturer
Thitronik GmbH
Finkenweg 11 – 15
D 24340 Eckernförde
(Germany)

www.thitronik.de
kontakt@thitronik.de
Tel.: +49 (0)4351 76744-0
Fax: +49 (0)4351 76744-127

